



Addressable panel connection

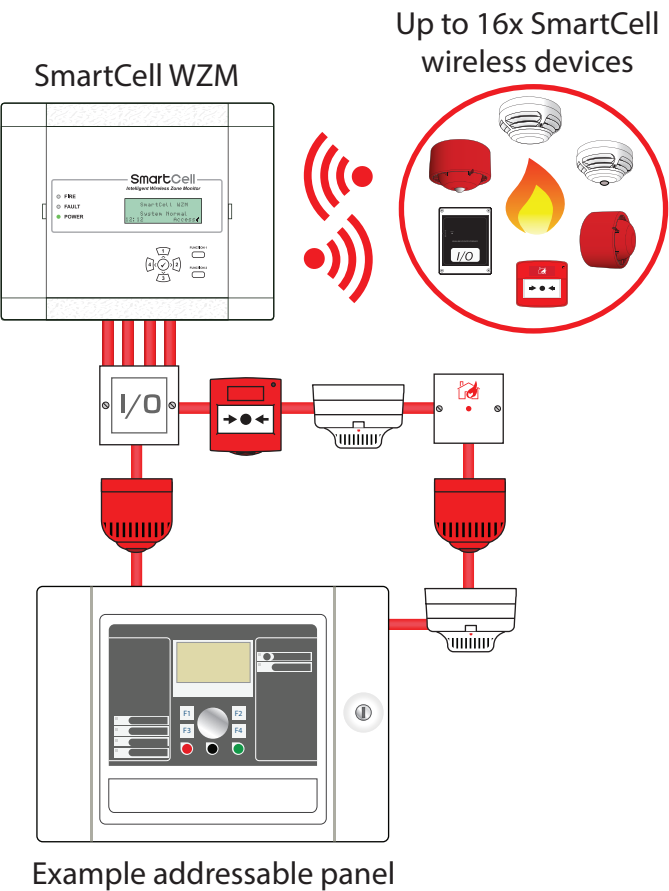

Conventional panel connection

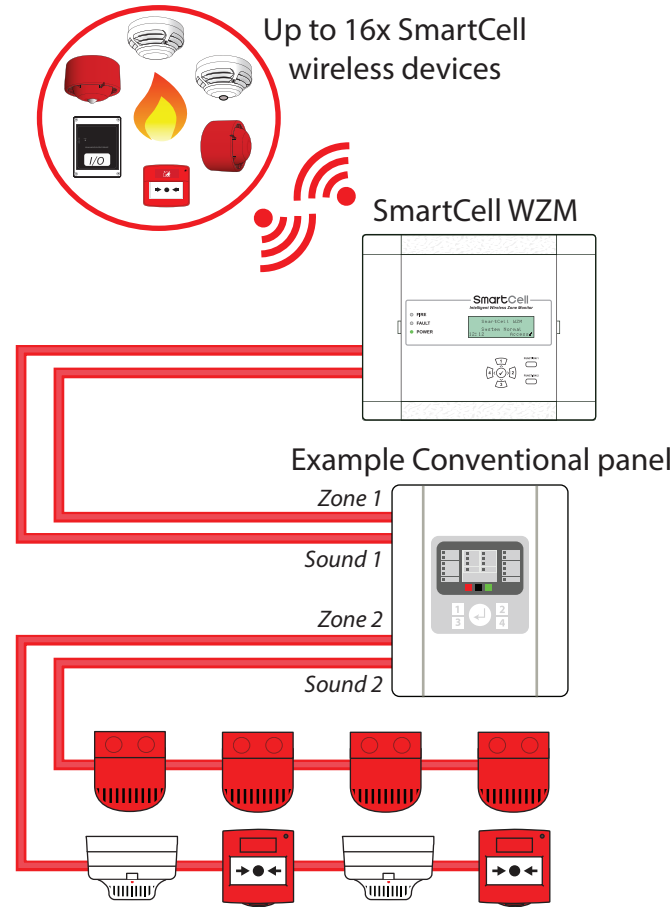

SmartCell

Wireless zone monitor



For more information contact:



SmartCell WZM benefits:



FAST
INSTALLATION



TRUSTED
TECHNOLOGY



INTUITIVE
INTERFACE



SECURE
WIRELESS



MINIMUM
DISRUPTION



FLEXIBLE
CONFIGURATION



COST
SAVING



EN54 25
CERTIFIED

Wireless Zone Monitor overview

The Wireless Zone Monitor (WZM) supports up to 16 SmartCell wireless fire devices with bidirectional communication between devices on the European harmonised 868MHz frequency band.

Designed with flexibility in mind, connection can be made to both conventional and addressable fire alarm systems.

SmartCell, the future of fire detection available now.

Compatible SmartCell wireless devices



Wireless dual smoke/heat detector with combined sounder VAD

Other detector variants :

- Wireless dual smoke/heat detector
- Wireless dual smoke/heat detector with combined sounder

Wireless Sounder and ceiling VAD

Other sounder variants :

- Wireless sounder
- Wireless sounder and wall VAD



Fire manual call point
includes protective transparent cover


Dual Input / output unit

Provides 2x resistor monitored inputs and 2x clean contacts relay outputs rated 2A @ 24 VDC



Quick and easy to install

SmartCell WZM and its wireless devices make it possible to quickly achieve compliance with the latest fire regulations in a fraction of the time needed with cabled alternatives through reduced installation time and less disruption on site.

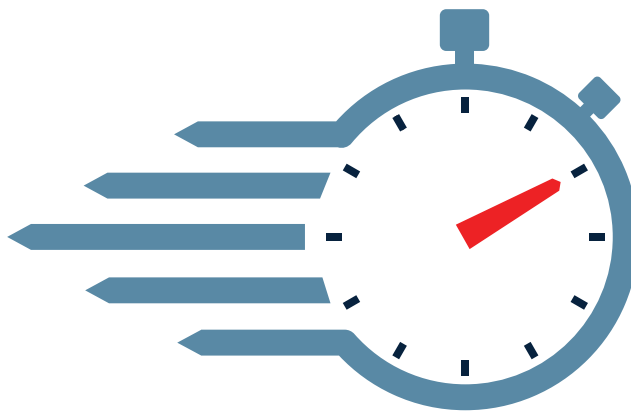

Highly adaptable


SmartCell WZM is suitable for virtually any building and in many cases exceeds the performance and flexibility of a wired devices.

SmartCell WZM offers onboard connections for both addressable and conventional fire alarm systems and accommodates up to 16 SmartCell wireless fire devices.

Cost effective


Eliminating expensive fire rated cable and the associated labour costs, extensive savings can be made throughout the installation and maintenance process as well as an overall reduction on the "cost of ownership".

WZM features

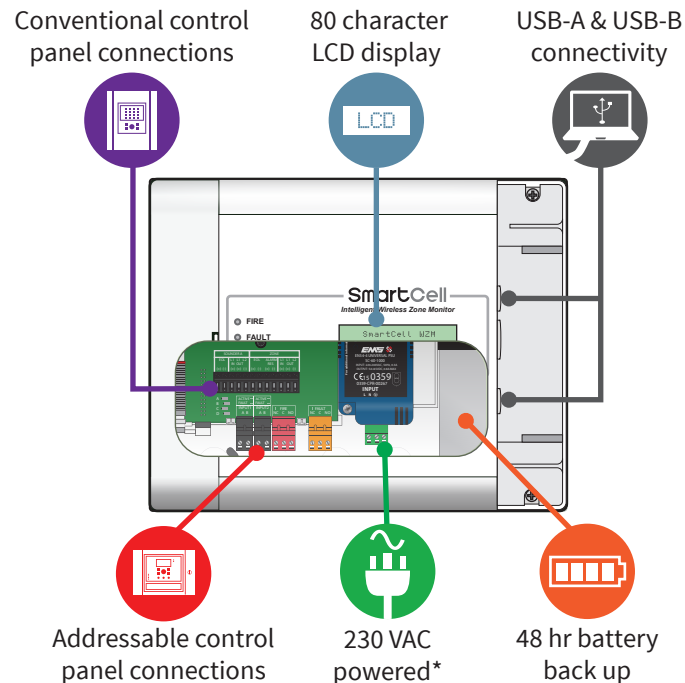

* An alternative 24 VDC version WZM is also available for use with a separate power supply for extended battery standby time.

Wireless devices packed with features†

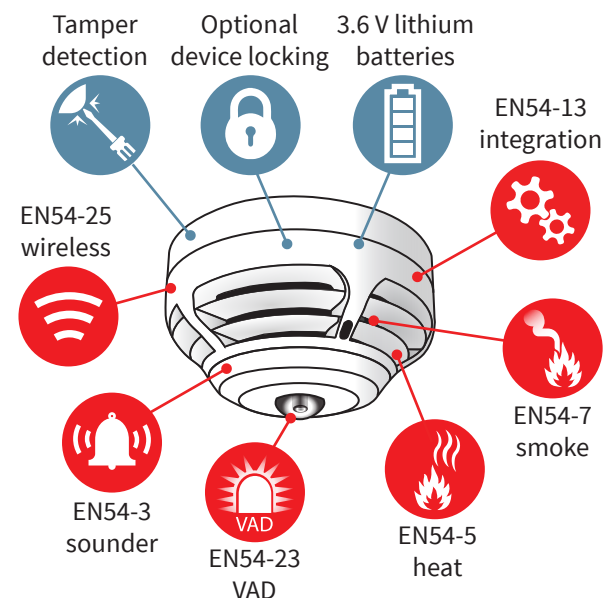

† Example shown - dual detector with combined sounder VAD