Descriptions

The T-218 is a high performance remote zone paging console that works with zone paging controller T-6600 for remote paging and control over a multi-zone system.

Several paging modes (all zone, group zones, 10 zones and individual zones) could be achieved through this paging console.
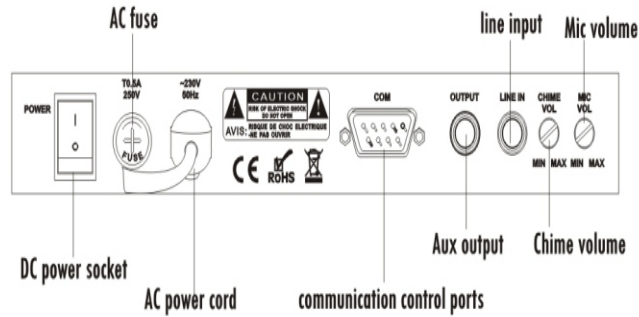
Features

* With operation number input keys and LED display
* Max remote control distance up to 1Km
* With microphone volume control
* RCA line input and output
* Built-in chime and chime volume control

Specifications

Model	T-218
Input	MIC: 600 Ω , 10mV, unbalancedLine: 10K Ω , 775mV, unbalanced
Output	Balanced
Frequency Response	MIC: 100Hz~15KHz, Line: 30Hz~18KHz
Communication Port	RS422
Controls	Chime MIC VOL controls, 160 channel selectors, chime button, power switch
Indicators	Powter LED, 10 paging channel LEDs
Power Supply	~110V/60Hz or ~230V/50Hz
Power Consumption	10W
Weight	1.25Kg
Dimensions (WxDxH)	245x185x50mm
Finish	Panel: steel plate, Black Case: steel plate,Black

Rear Panel   T-218

AC fuse

line input   Mic volume

POWER   T0.5A 250V   ~230V 50Hz   CAUTION   RISK OF ELECTRIC SHOCK DO NOT OPEN   AVIS: RISQUE DE CHOC ELECTRIQUE NE PAS OUVRIR   COM   OUTPUT   LINE IN   CHIME VOL   MIC VOL   CE   RoHS   MIN MAX MIN MAX   FUSE

DC power socket

AC power cord   Aux output   Chime volume

communication control ports

Connections

Emergency Switch T-6223(A)

Alarm Signals Input

Weekly Timer with 8x16 Audio Matrix and Mp3 T-6600

T-6227 CD Player

T-6228 AM/FM Tuner

TW-1250 Telephone Interface

T-218

T-6240 Pre-amplifier

T-6240 Pre-amplifier

T-6216 Power Sequencer

T-6220 Amplifier Monitor

zone 1— — zone 20

T-4S120B 4-Channel Amplifier

1-4 zone Speaker output

T-4S120B 4-Channel Amplifier

5-8 zone Speaker output

T-4S120B 4-Channel Amplifier

9-12 zone Speaker output

T-4S120B 4-Channel Amplifier

13-16 zone Speaker output