

Long Range 500m RECEIVERS



Features

Code hopping Encryption

Latch or Momentary

Selectable Momentary times

1 Sec; 3Sec; 1min; 3min; ON/OFF

Buzzer tone

Crystal Controlled +/- 100KHz

Frequencies: 403MHz / 433MHz

12 - 24V AC/DC input

Weatherproof housing

Specification:

Encryption:	Code-hopping
Range:	500m (Open air)
Frequency:	403MHz
Memory Capacity:-	
RX1-500	80 Remotes
RX4-500	64 Remotes
Voltage Range:	9.8V to 26V AC/DC
Current draw:	20mA
Dimensions (lxbxh):	187 x 104 x 67mm
Gross Weight:	235 grams
Operating Temp:	-3°C to 65°C
Warranty:	24 Months
Release Date	June 2009

Applications

Gate & Garage Door Access Control

Panic Activations


Arming / Disarming Alarm systems

Switching On / Off lights

Switching On / Off Generators

Order Code

1 Ch Receiver -80 Users	RX1-500
4 Ch Receiver - 64 Users	RX4-500
Data Receiver + RS485	ASKDRX_V3

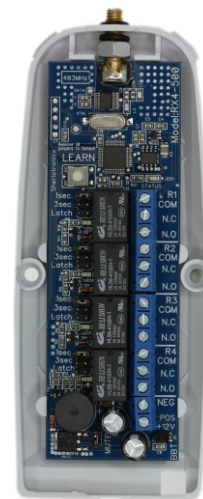

Inside View
RX4-500