

## Descriptions

The T-6240 is a public address pre-amplifier with eight line level inputs, one unbalanced MIC input and two EMC(priority) level inputs. Each of the eight input channels can be selected via front panel push buttons for use with the MIC input, in this way the T-6240 can be used to page individual channel. Priority muting is achieved via EMC1-2 inputs for overriding other inputs except Mic1. Individual gain controls are provided for each channel and MIC inputs.


## Features

- \* 8 unbalanced line/Mic inputs by phone jack
- \* 8 unbalanced line outputs
- \* One Mic input with VOX priority
- \* Two EMC priority inputs
- \* EMC1 has priority over all inputs(Except MIC 1)
- \* 2U rack-mount chassis

## Specifications

<b>Model</b>	T-6240
<b>Input</b>	MIC: 70mV/600 $\Omega$ , unbalanced CH1-CH8: 350mV/10K $\Omega$ , unbalanced EMC: 1.2V/10K $\Omega$ , unbalanced
<b>Output</b>	1V, 600 $\Omega$
<b>Frequency Response</b>	50Hz~18KHz( $\pm 2$ dB)
<b>S/N Ratio</b>	MIC: 66dB, LINE: 80dB
<b>THD</b>	0.01%
<b>Crosstalk</b>	MIC: 80dB, LINE: 85dB
<b>Muting Function</b>	EMC1, 2 overrides other input signals exception MIC1 With 0-30dB attenuation
<b>Controls</b>	LINE, MIC volume controls, channel selectors, power switch
<b>Indicators</b>	Power LED, MIC channel LED
<b>Protection</b>	AC fuse: 1A
<b>Power Supply</b>	~110V/60Hz or ~230V/50Hz
<b>Power Consumption</b>	35W
<b>Weight</b>	4.6Kg
<b>Dimensions</b>	484x303x88mm
<b>Finish</b>	Panel: aluminum plate, black Case: steel plate, black

Rear Panel T-6240

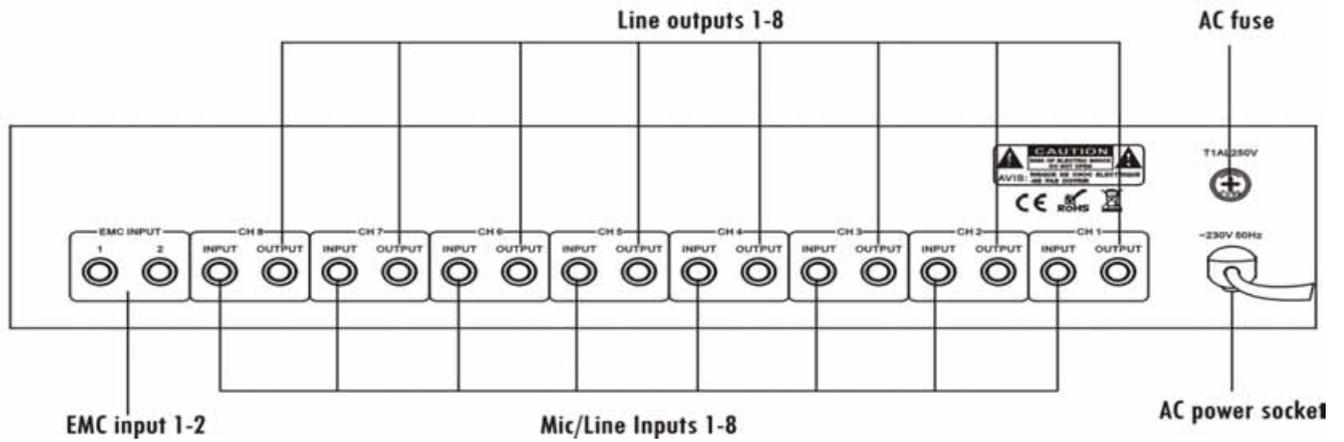

Connections

