

**Features**

- Built-in 100v/70v transformer
- Fireproof wall mount type loudspeaker
- Ceramic connector, thermal fuse and fire-resistant cable
- 5" full range speaker unit
- Power taps 0.75w-1.5w-3w-6w @100V
- Metal grille and metal back cover
- Painted in white color
- Easy & secure wall mount hook installation

**Description**

The TF-700 is a fireproof wall mount speaker built-in 70v/100v transformer. The 70v/100v transformer technique reduces line losses on longer distance and allows easy parallel connection of multiple loudspeakers.



The built-in 5" full range speaker driver is designed of wide frequency response 100-16kHz, the multiple power taps 0.75W, 1.5W, 3W & 6W are helpful for different applications varies from room size and ambient noise surroundings.


The metal grille and metal back can plus ceramic connector, thermal fuse and fire-resistant cable, all of the above features make it is fireproof. Its wall mount type makes the easy and secure installation.

This fireproof wall mount speaker is specially designed for fire alarm and voice evacuation system, which is designed and manufactured according to EN54-24 standard. It is ideal choice for industrial and commercial applications in hotel, school, office and factory where background music and paging is needed.


**Specification**

Model	TF-700
Power Taps @100V	0.75W, 1.5W, 3W, 6W
Power Taps @70V	0.37W, 0.75W, 1.5W, 3W
Impedance	Com/13.3KΩ/6.7KΩ/3.3KΩ/1.7KΩ
SPL(1W/1M)	91dB±3 dB
Max. SPL (Rated W/1M)	99dB
Frequency Response (-10dB)	100-16KHz
Finish	Baffle: Steel, White    Grille: Steel, White
Speaker Driver	5" x 1
Dimensions	245 x 212 x 95mm
Weight	1.9Kg
Mounting	Hook

**Appearance:**

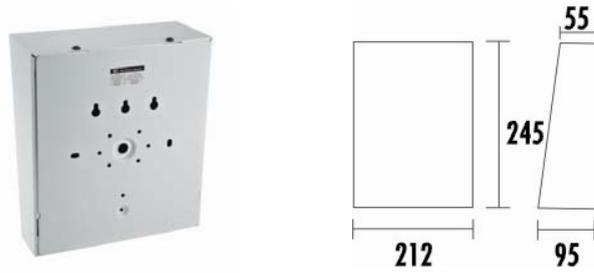

**Direction Diagram:**

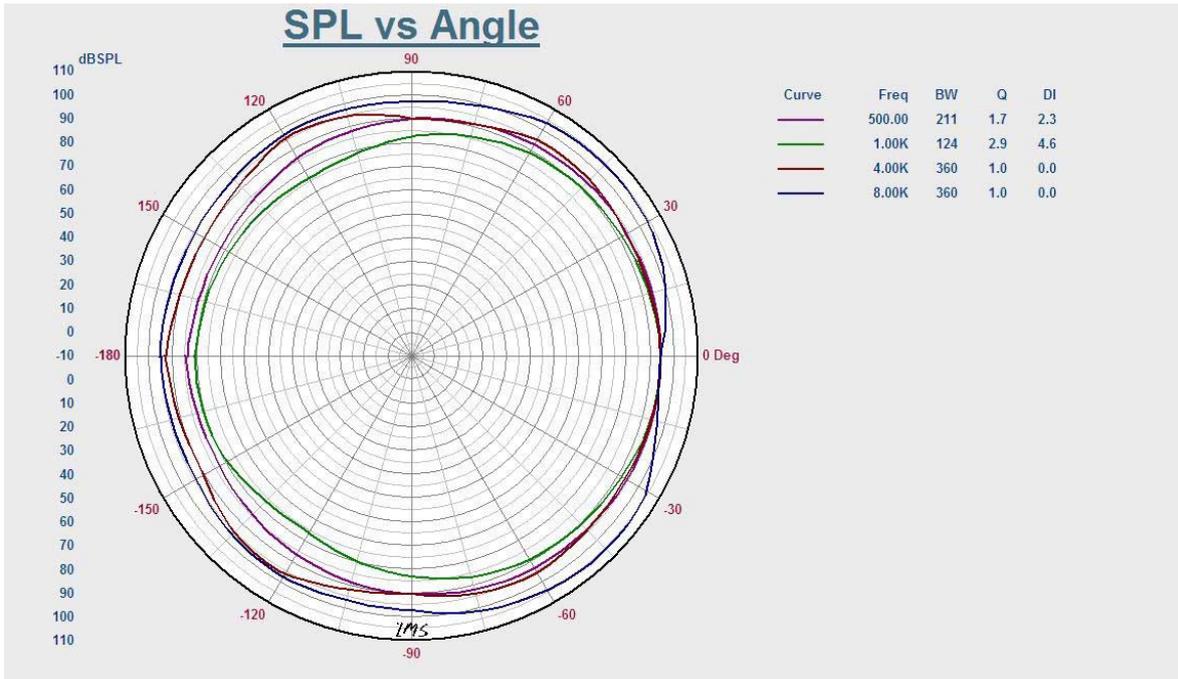

**Frequency Response:**

