

# ZP886R-S27

## ZP7 Series intelligent addressable manual call point, English

### General

---

The ZP880 Series is an intelligent range of addressable manual call points. The ZP886R-S27 is a red, single action indoor MCP. It is delivered complete with resettable element, test connector and test key. Multiple optional accessories are available to facilitate most indoor installation requirements.

### Aesthetics

---

This single action MCP is a standard profile, indoor MCP suitable for surface and recess mount installations using standard or legacy European electrical boxes. With its designer dual, tricolour LEDs it offers 180°, clear local indication of its operational status, even from a side view in a passage installation. The clean face of the MCP is further enhanced by a front access & test key facility.

### Installation & maintenance friendly

---

The front facing access for an aesthetically matching test key allows unhindered access regardless of the installation location. The MCP key doubles as a test and disassembly tool allowing removal of the MCP front cover without the need for additional tools.

### Compatibility

---

The ZP880 range may be used on compatible Ziton fire systems. They can be deployed seamlessly into existing legacy systems without CIE configuration changes.



### Details

---

- Reliable single action manual call point for surface and flush mounting
- Dual, tri-colour status indicators offers 180° alarm visibility
- Tamper resistant design with resettable or frangible element
- Unobtrusive front facing test facility
- Standard mounting options facilitates easy retrofitting to existing installations
- Matching back box with rear, top and bottom cable entry
- Screen connection terminal for electrically noisy installations
- Pluggable connector with link through facility for ease of installation and pre-commissioning testing
- An alarm flag on the face of the manual call point allows alarm indication even without alarm LEDs
- Fast, no-tools-required maintenance using the test key
- Up to 127 devices per loop

# ZP886R-S27

## ZP7 Series intelligent addressable manual call point, English

### Technical specifications

#### Allmänt

Status indication	Dual LEDs, Alarm (red constant), Isolated (yellow constant), Fault (yellow blinking), Communication (green blinking)
User interface	LEDs, Alarm flag
Compatibility	Ziton ZP7 systems
Addressing method	DIP Switches

#### Spänning

Power supply type	Loop powered
Operating voltage	16 to 20 VDC
Current consumption	250 µA (Quiescent) 280 µA (Alarm)
Cable specification	0.404 to 2.05 mm (0.13 to 3.31 mm <sup>2</sup> )
No. of cable cores	2
Terminals	4 (A+/A-;B+/B-)

#### Avkänning

Detection principle	Push button/switch
Monitoring	Activated, Fault, Off
Response time	< 3 s
Installation height	Determined by local regulation

#### Mått


Physical dimensions	87 x 87 x 26 mm (w/o back box) 87 x 87 x 57 mm (w/ back box)
Net weight	110 g (w/o back box) 165 g (w/ back box)
Colour	Red (RAL 3028)
Mounting type	Back box, Recessed mount, Wall mount
Material (body)	Flame retardent ABS
Functional marking	House on Fire, FIRE

#### Miljö

Vandal proof	No
Operating temperature	-25 to +72°C
Storage temperature	-25 to +72°C
Relative humidity	10 to 95% noncondensing
Environment	Indoor
IP rating	IP41

#### Regulatory

Compliance	CE, REACH, RoHS 3, WEEE
Certification	CPR
Certification marks	APPLUS
Standards	EN54:11

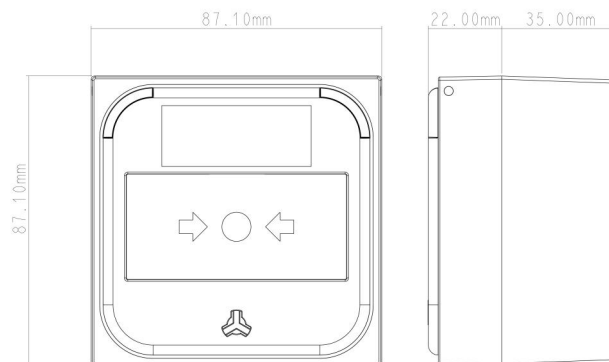

As a company of innovation, Carrier Fire & Security reserves the right to change product specifications without notice. For the latest product specifications, visit [firesecurityproducts.com](https://firesecurityproducts.com) online or contact your sales representative.

Last updated on 26 June 2023 - 12:58