




SOP-5200VA Sound Projector

【 EN 54-24 】

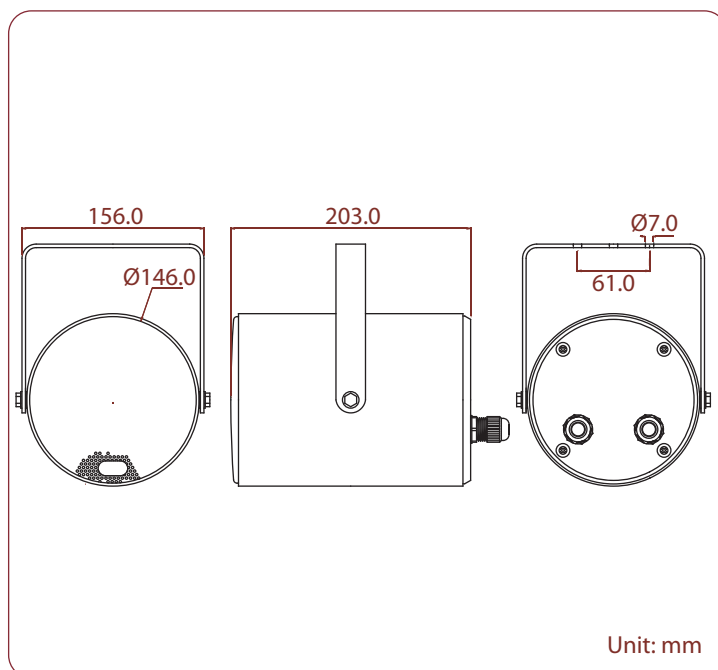

✓ CE Certified (EMC & LVD)

✓ IP Rated

✓ Rustproof

✓ UL94 5VB

✓ Withstanding/Insulation Tested

✓ BS 5839 Part 8 & EN 60849

✓ EASE Data

✓ RoHS Compliance

✓ UV Stable

- EN 54-24 certified
- Compliant to British Standard BS 5839 part 8 and EN 60849
- Ingress protected to IEC 529 IP 66
- Two cable entries to enable loop in loop out installation
- UV stable UL94V0 high impact ABS housing
- Finished in white



Model No.	SOP-5200VA
Rated Power (rms)	20W
Impedance	250Ω, 500Ω, 1kΩ, 2kΩ & 4kΩ
Power Taps @ 100V	20W, 10W, 5W & 2.5W
Power Taps @ 70V	20W, 10W, 5W, 2.5W & 1.25W
SPL (1W / 1m)	92dB
Max. SPL (Rated W / 1m)	106dB
Frequency Range (-10dB)	150 Hz ~ 20k Hz
Dispersion 1k Hz / 4k Hz	153° / 60°
Operating Temperature	-30°C ~ +60°C
Ingress Protection	IEC 529 IP 66
Power Selection	Plug
Material	Housing: UL94V0 high impact ABS, Grille: Aluminium
Colour / Finish	White
Dimensions	146.0 (5.75) Dia. X 203.0 (8.00) L mm. (in.)
Net Weight (ea)	2.00 kg (4.41 lb)
Mounting	U Type aluminium bracket